

Real-Time, Scintillator-Based, Large-Area Particle FLASH Radiotherapy Beam Monitor and Dosimeter

Peter S. Friedman (PI) – *Integrated Sensors, LLC, Palm Beach Gardens, FL*

Collaborators

Daniel Levin (PI), Nick Ristow, Claudio Ferretti, Monica Tecchio – *University of Michigan Physics*


Dale Litzenberg – *University of Michigan Hospital (Radiation Oncology), Ann Arbor, MI*

Reinhard Schulte, Vladimir Bashkirov – *Loma Linda University, Loma Linda, CA*



Safety Problem: Monitoring FLASH Delivery

- Challenge: To be clinically approved (FDA/NIH/IRB) FLASH-RT must be monitored in real-time so the beam can be **immediately** terminated if a problem develops given the **~1000X higher dose rates** and **~ 0.1 sec** total delivery time.
- Conventional beam monitors are not capable of **large-area 2D imaging** with **full analysis in real-time** at FLASH rates.
- Our Solution: **FLASH Beam Scintillator Monitor (FBSM)** that continuously images & analyzes beam every **~50 μ s** as the patient is irradiated.

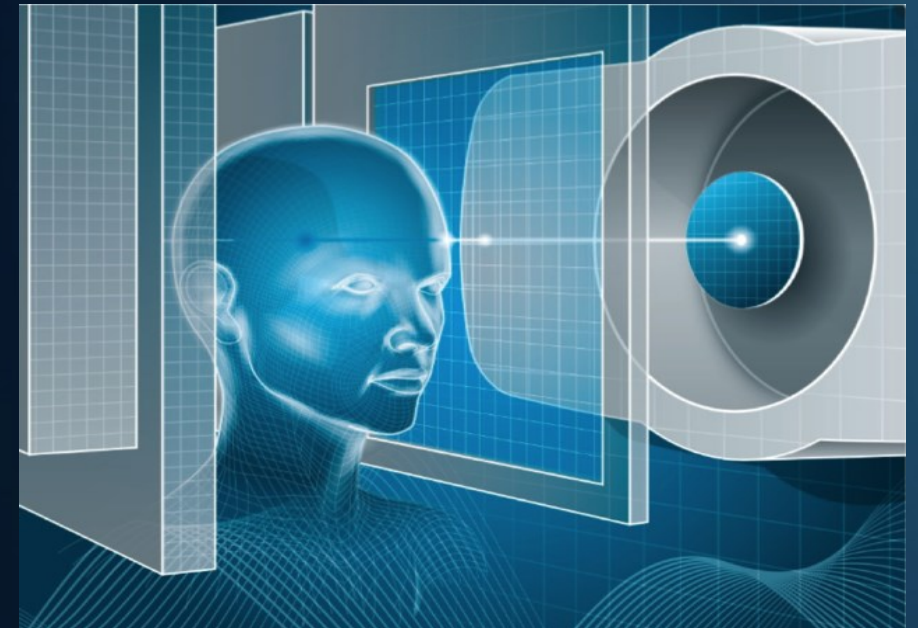




Performance Objectives

✓ = *achieved*

- Fast, real-time response to produce beam interlock, IEC compliant (in progress)
 - Deliver < **10% of total dose** (or < 10% deviation from treatment plan) **in case of fault**
 - Scanning proton beams: process at **50 μ s** → **20,000 fps**, analysis in **~ 1 μ s** ✓
 - Pulsed electron & VHEE beams: data acquisition/process rate ≤ 1000 Hz → **1 ms** (in progress)
- **Spatial resolution**: ~ 50 μ m on centroids ✓
- **Dynamic range**: beam center to tails span 2 orders-of-magnitude ✓
- **Low mass** & thin profile: ~ 0.5 mm WE and profile/depth of ~ 10 cm ✓
- Large area: 15 cm x 15 cm ✓ to 15 cm x 23 cm (in progress)
- **Real-Time Dosimetry**: within ~ 50 μ s for protons ✓
- **Radiation resistance**: > 1 year of clinical usage (5 d/wk; 50 wk/yr) < 1% signal loss/yr ✓



Large-Area FLASH Beam Scintillator Monitor*

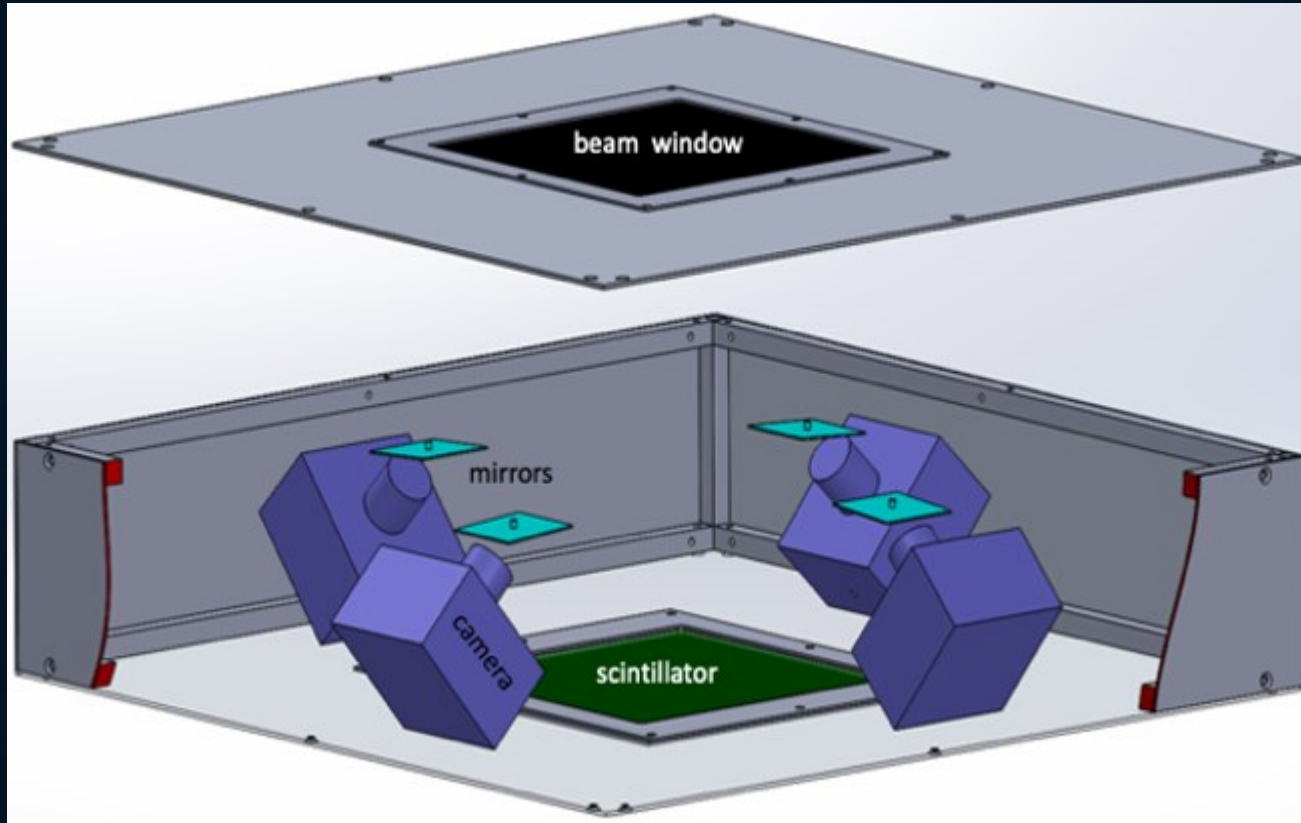

- Large **30 cm x 30 cm** sensitive area
- Quadrant system with 4 cameras
- Thin **11 cm profile** with folded optics
- Ultrafast machine-vision cameras
- Triggered or quasi-free-running modes
- FPGA data processing & analysis
- **Low mass profile** ~ 0.5 mm WE

**NIH-NCI \$1.9M “Direct-to-Phase-II”
SBIR Award 2021-2024*

** 1st Generation **FBSM** Conceptual Design*



Large-Area Proprietary Scintillators

Type 1: **Hybrid Material (HM)** – Inorganic polycrystalline ceramic hybrid

- Thin < 500 μm WE

Type 2: **Polymer Material (PM)** – Semicrystalline

- Ultrathin to Thin: tested 2 μm to < 300 μm WE

Both Types 1 & 2 have favorable properties:

- Radiation hard
- Sharp images – no internal reflections
- Non-hygroscopic
- Highly transmissive
- Extremely high light emittance for their respective type







Test Beam Results for Prototypes

at **FLASH Dose Rates**


Notre Dame Radiation Laboratory	e^-	8 MeV,	> <u>200</u> Gy/s
U. Michigan Ion Beam Laboratory	p^+	5 MeV,	> <u>300</u> Gy/s
Facility for Rare Isotope Beams	$^{86}\text{Kr}^{+26}$	2.75 MeV/u,	~ 0 - <u>50</u> Gy/s

Single - Particle to FLASH Dose* with $^{86}\text{Kr}^{+26}$

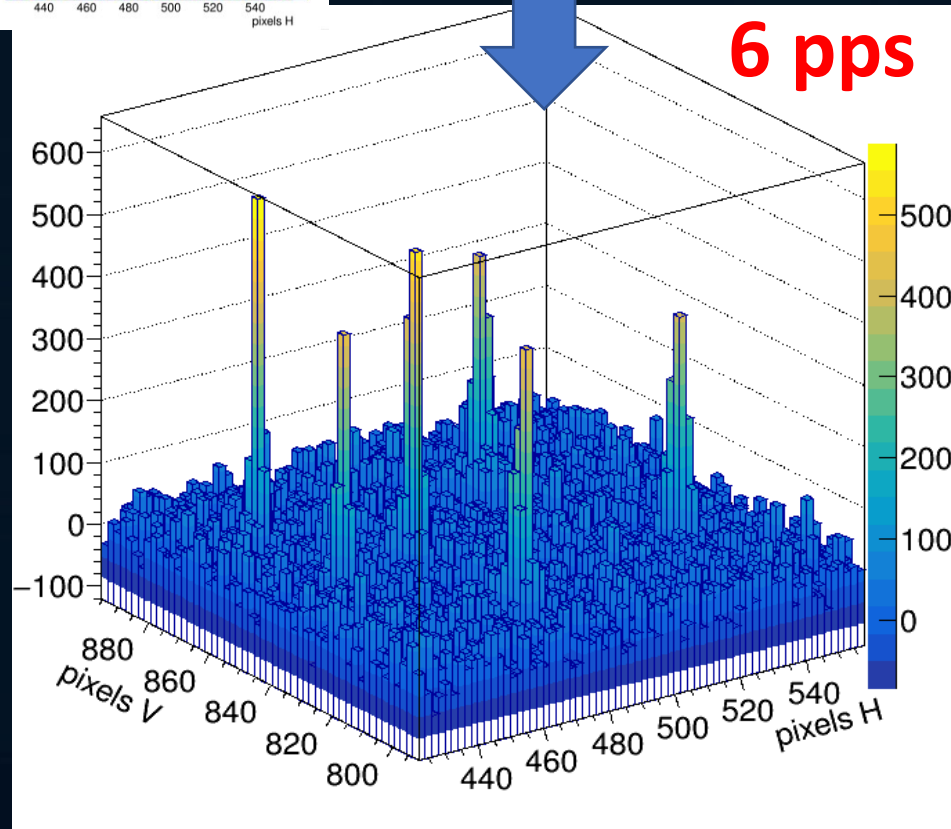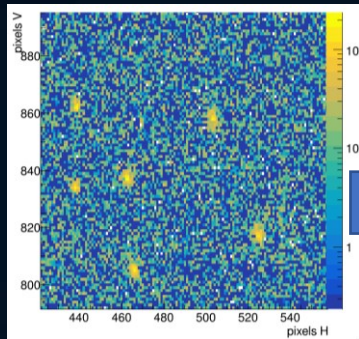



*Krypton is a mixture of six stable isotopes with ^{86}Kr being the heaviest of its natural isotopes.

Scintillator Efficiency Comparisons to Benchmarks





3 mm collimated electron beam (β^- source ^{90}Sr)

PM type

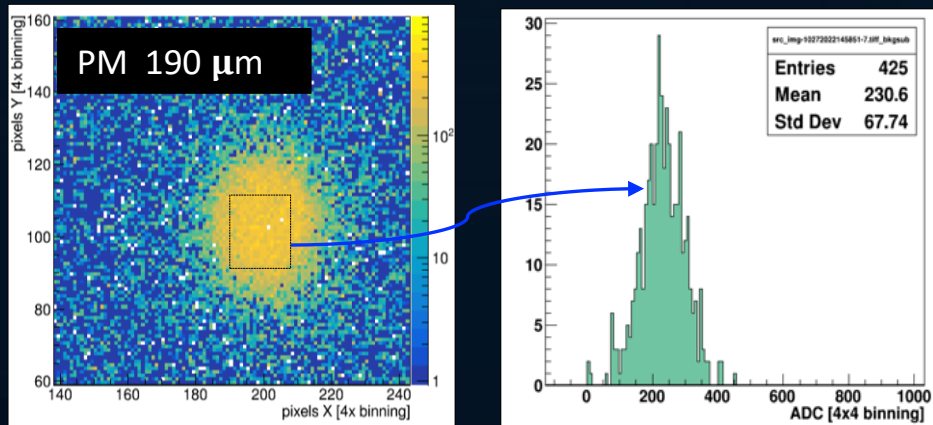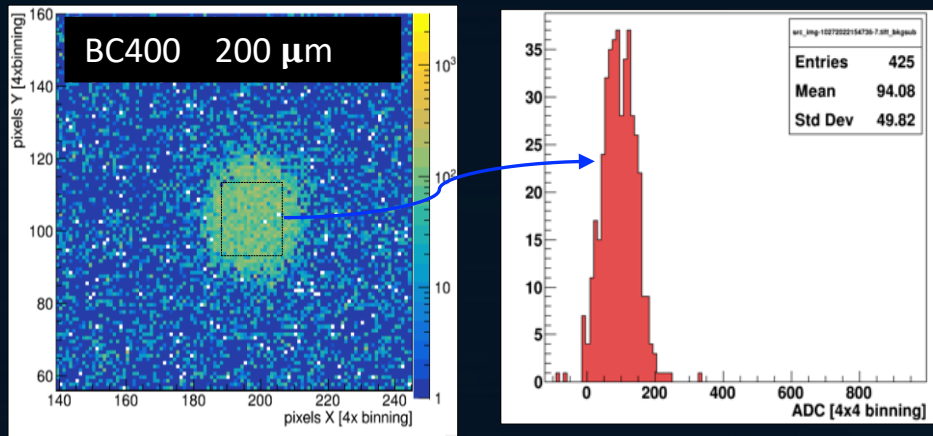


HM type

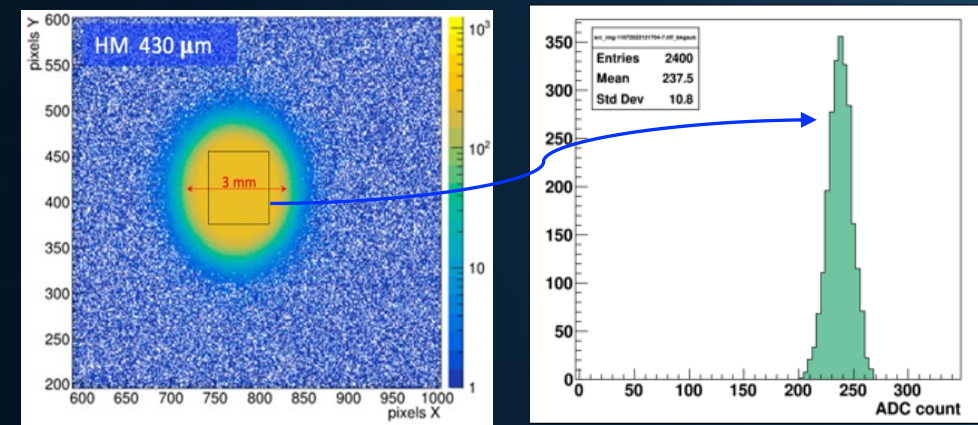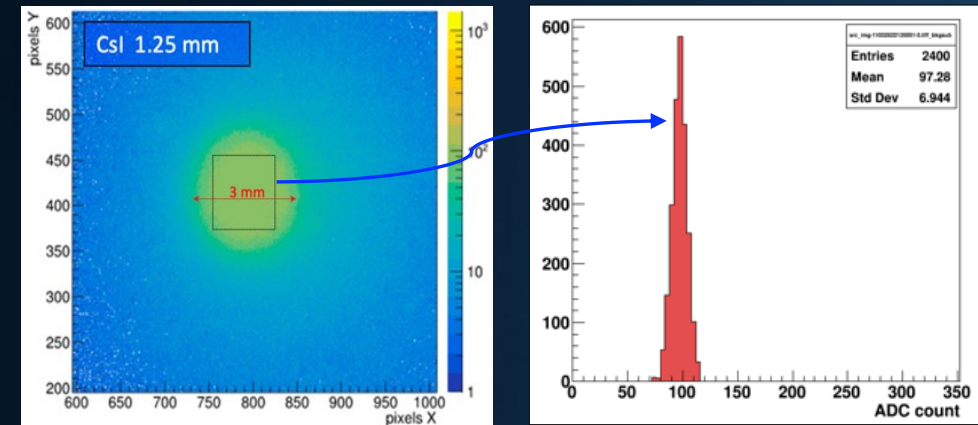



Beam Current in HM Scintillator


Kr⁺²⁶ Beam Monitor Rate vs FRIB Instruments Rate

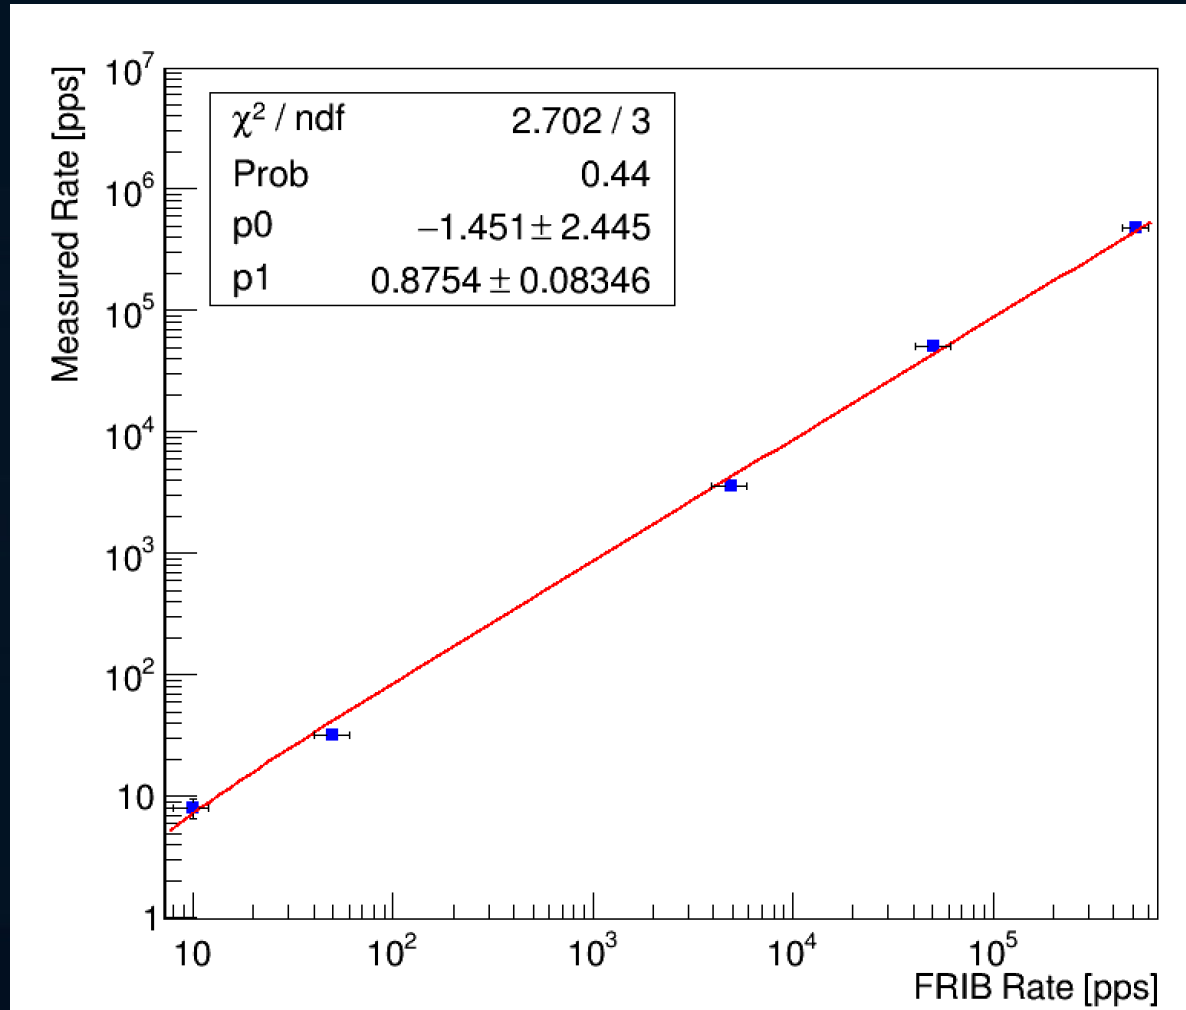

→ Result 1: Beam monitor measures currents over range covered by *4 different FRIB devices*


- Faraday Cup
- Calibrated beam attenuator
- MCP detector
- Silicon detector

→ Result 2: **Linear up to at least 5 decades to FLASH dose rates**



Dose Response in HM Scintillator

8 MeV Electron Beam at 30 Hz (Notre Dame Lab)

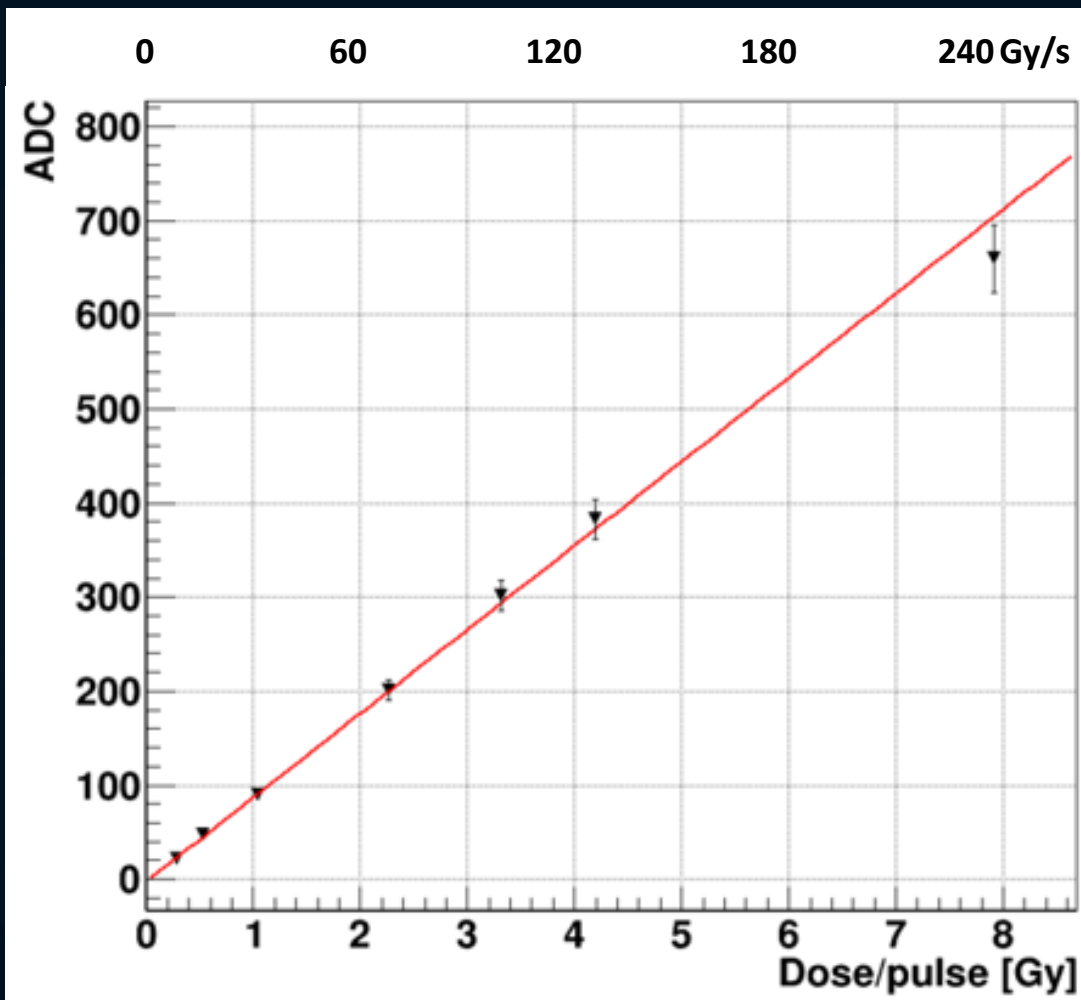

Each data point = average of 100 pulses.


Pulse width in all cases ~ 2 ns.

At 30 Hz, average dose rate ranges from ~ 6 to >200 Gy/s, which is well beyond the required 40 Gy/s for FLASH.

Linear response to *high dose* FLASH rates.



Radiation Hardness of HM Scintillator

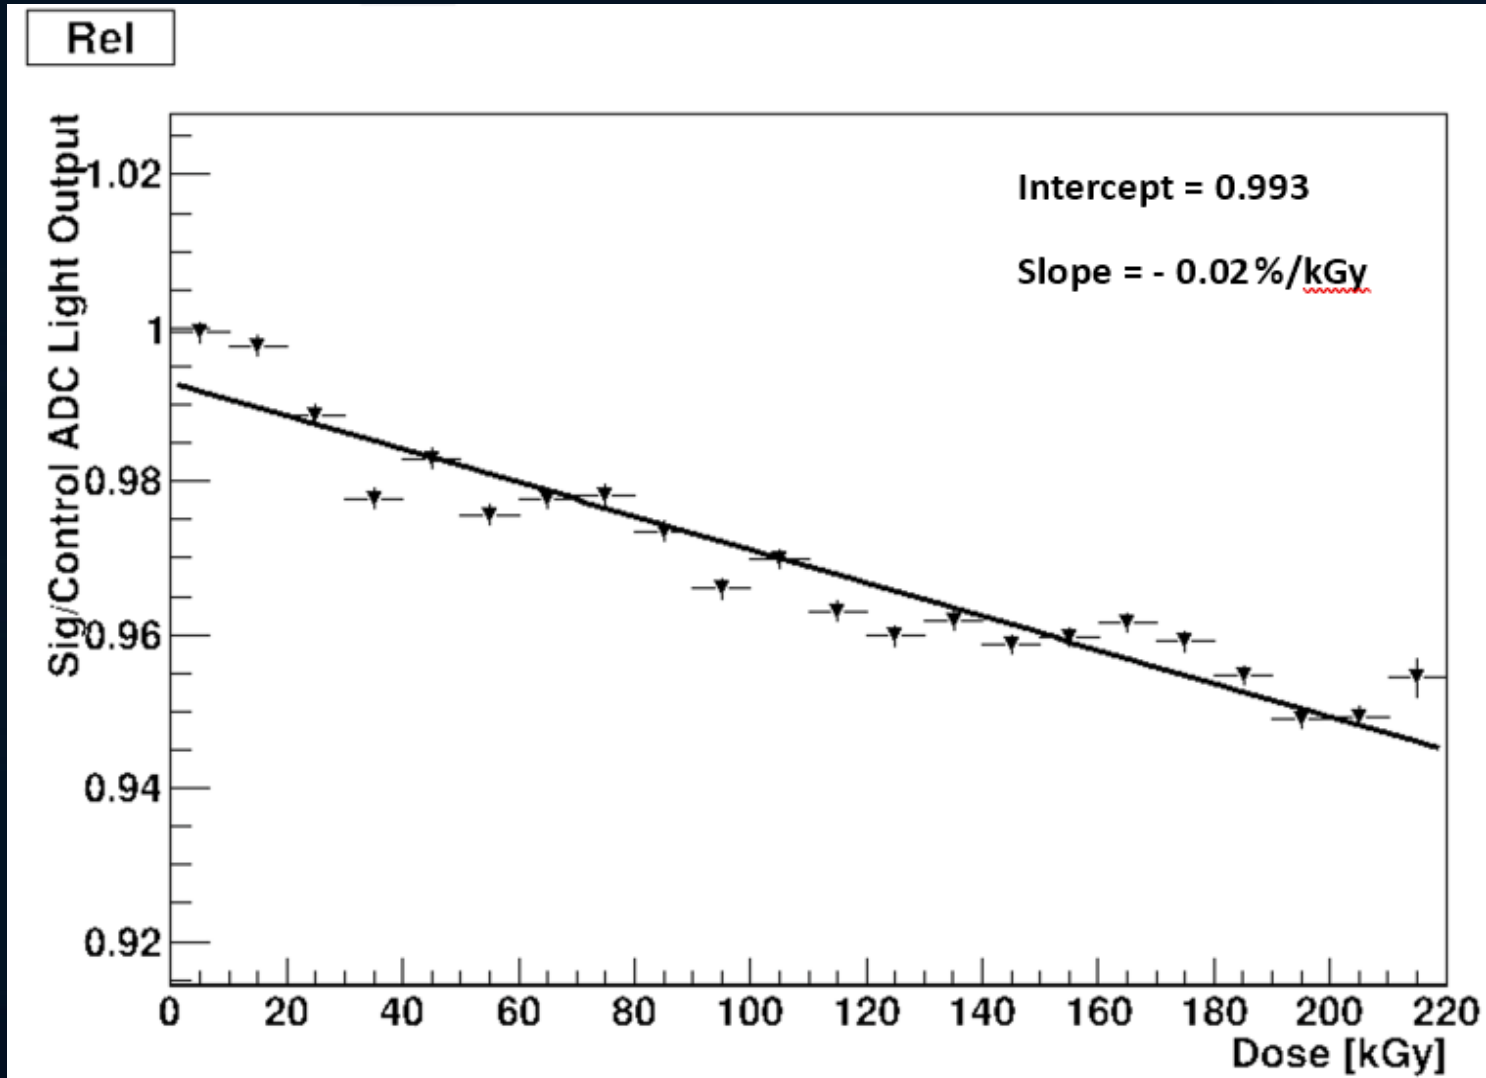


Low signal loss of $\sim 0.02\%/kGy$ measured over 216 kGy in 15 minutes (i.e., rate = 237 Gy/s).

> 1 yr of continuous FLASH patient use yields < 1 % signal loss ($>10^5$ acceleration factor).

Signal loss is correctable with periodic calibration system.



HM Scintillator Image of 1 ns FLASH Pulse

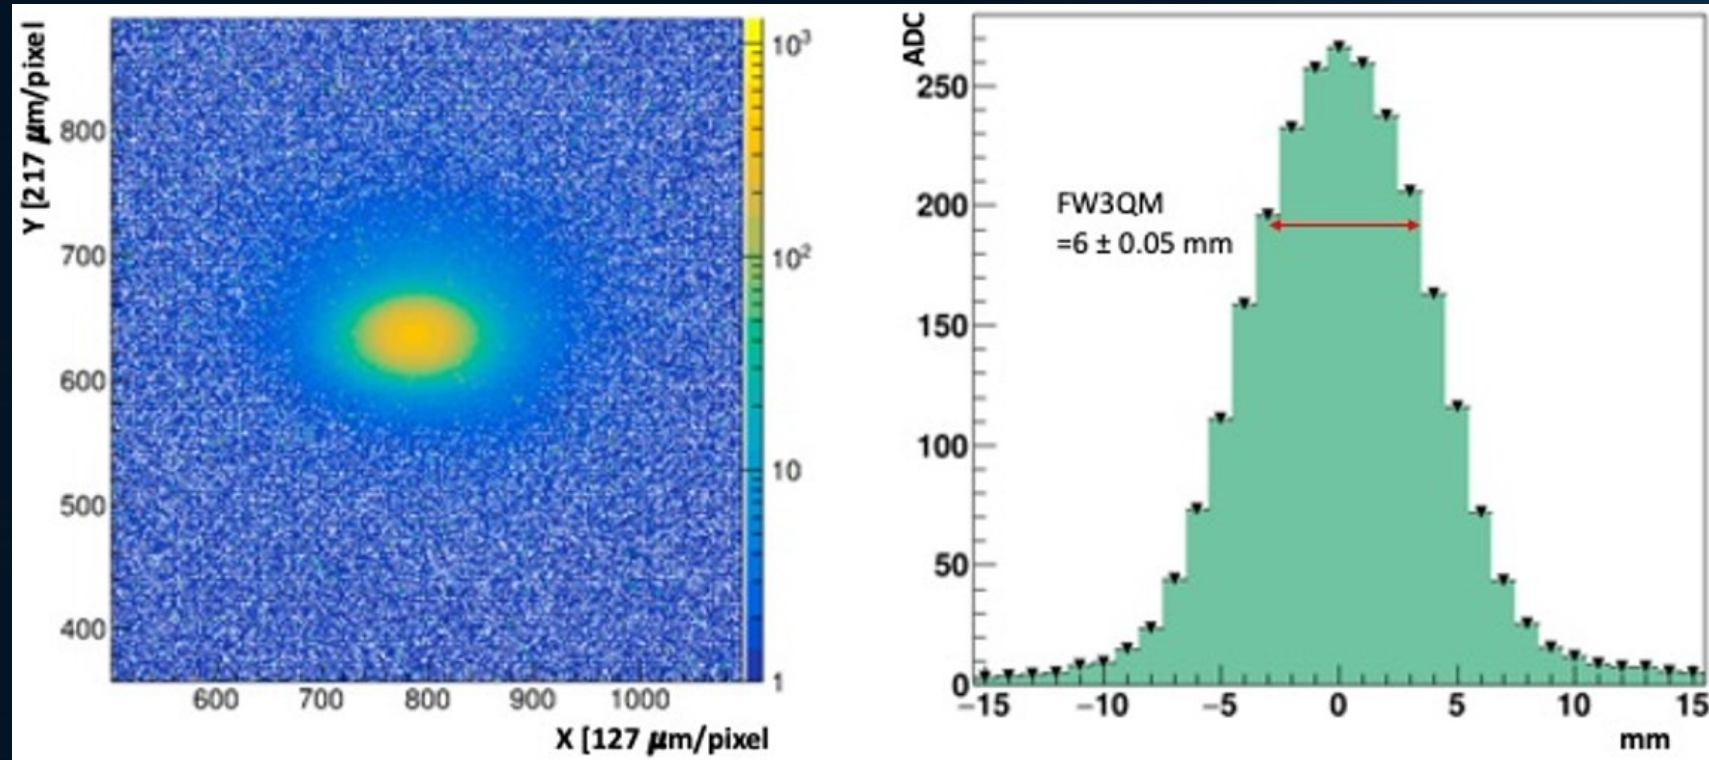

Left – Single 1 ns pulse image of **3.3 nC** electron beam (8 MeV) hitting the HM scintillator.
Right – From pulse profile, dose per pulse = **7.9 Gy/pulse** (at 30 Hz) => **237 Gy/s**.



Beam Monitor Energy Loss & Scattering*

140 MeV Proton Beam → Energy Loss in Beam Monitor = **0.32 MeV**

100 MeV Electron Beam → Energy Loss in Beam Monitor = **0.11 MeV**

10 MeV Photon Beam → Energy Loss in Beam Monitor = **0.005 MeV**


Beam Spread ($\sigma = 3.5$ mm) 30 cm Downstream from Monitor*

4.4% for Protons, **20.7%** for Electrons, **~ 0.8%** for Photons


* Geant4-11.2 simulations excluding losses in air & assuming incident beam is non-divergent



Beam Tests at U. Michigan Radiation Oncology

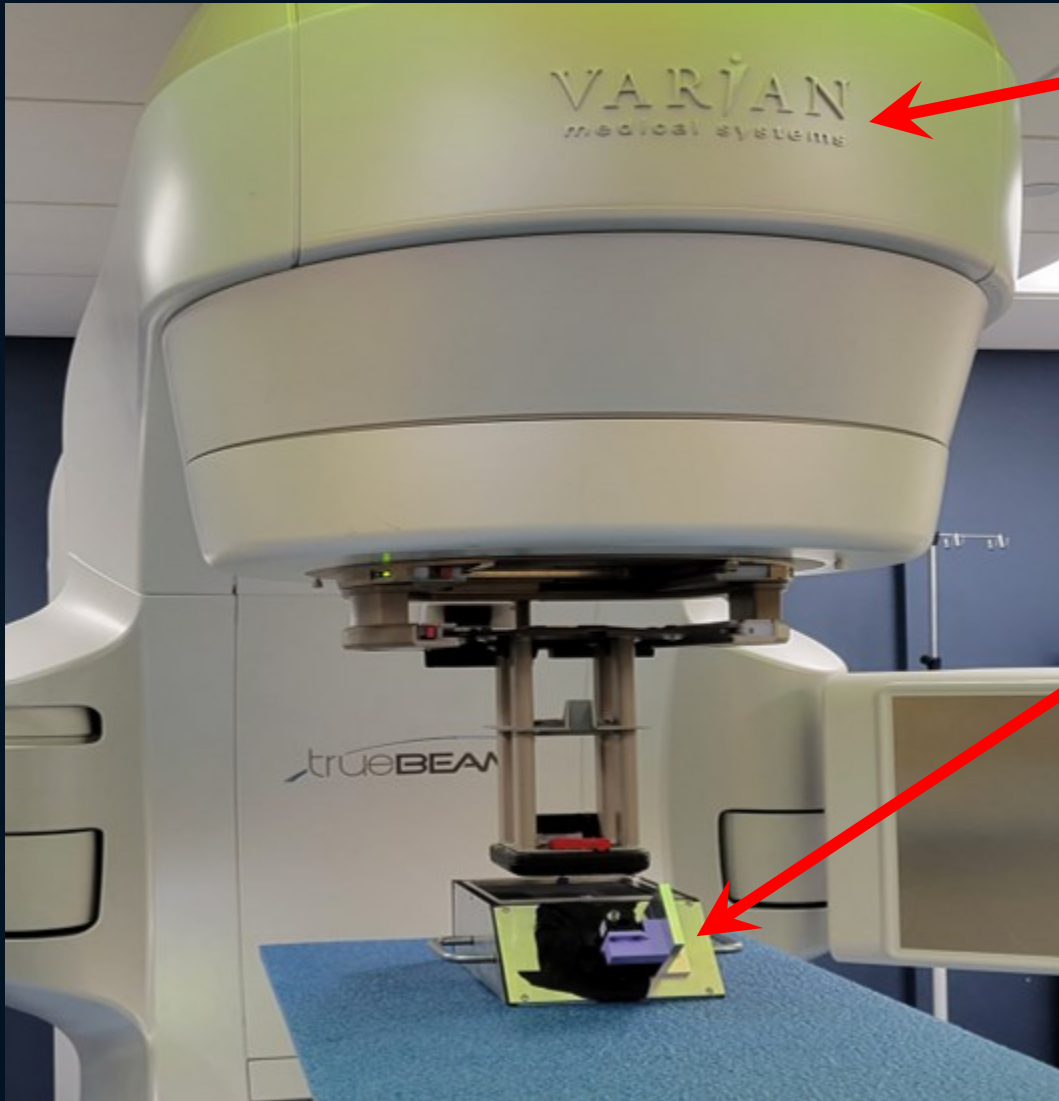

Varian linac: electron energy 6-16 MeV
Conventional dose rate = 1–10 Gy/min

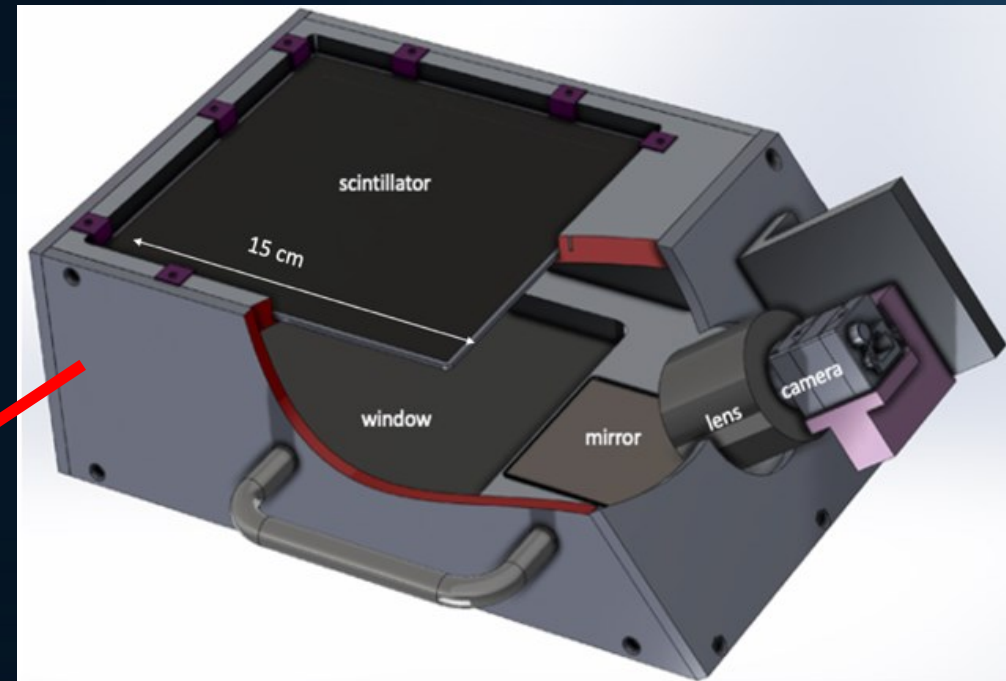


Prototype FLASH Beam Scintillator Monitor
(FBSM) single camera, 15 cm x 15 cm



Beam Shape & Spatial Resolution

HM Scintillator vs Gafchromic Film

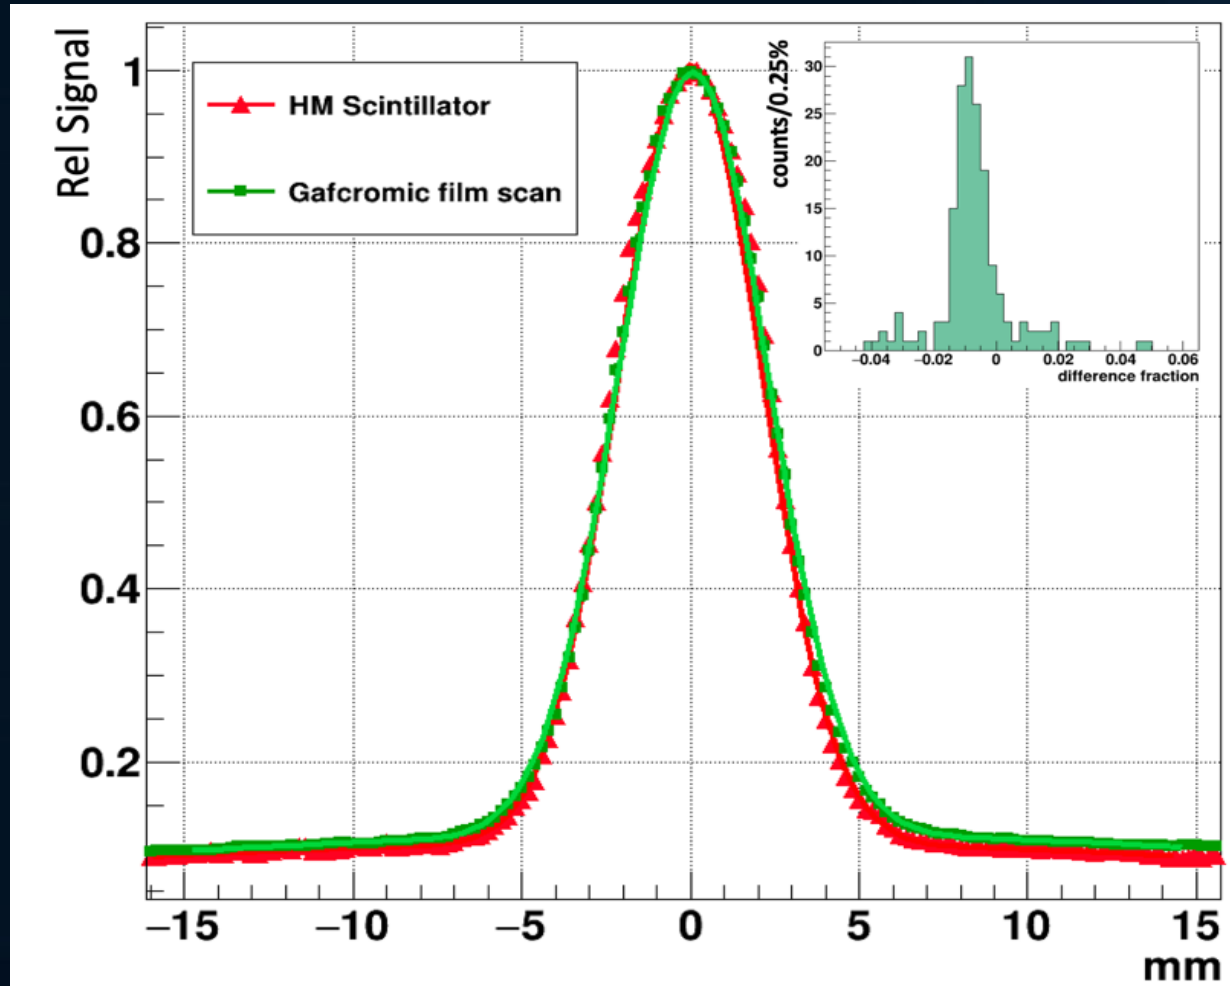




HM scintillator resolution is similar to Gafchromic film resolution ($\lesssim 25 \mu\text{m}$).

2D beam profiles are nearly identical.

Beam monitor primary advantage is real-time analysis






FBSM Spatial Resolution at 200 fps

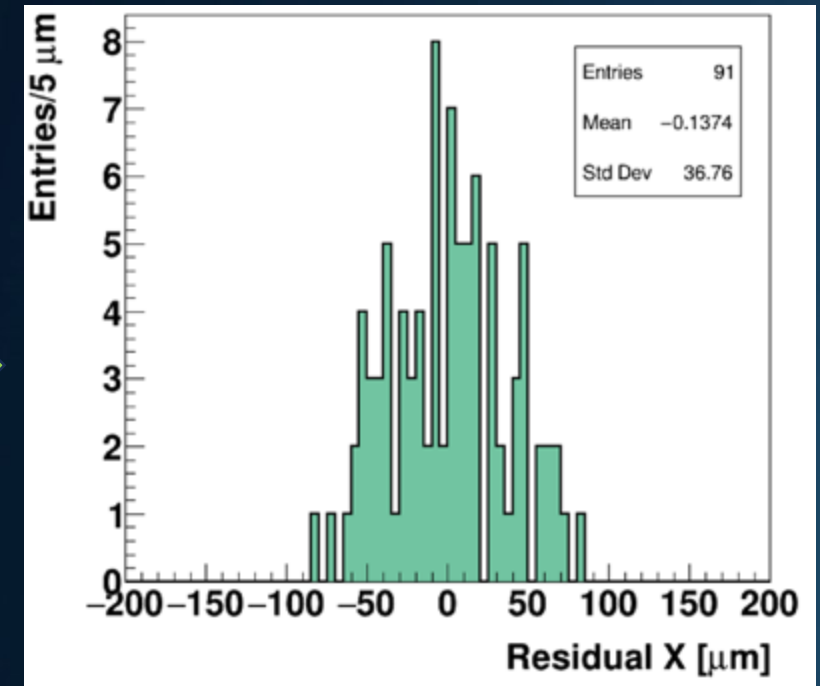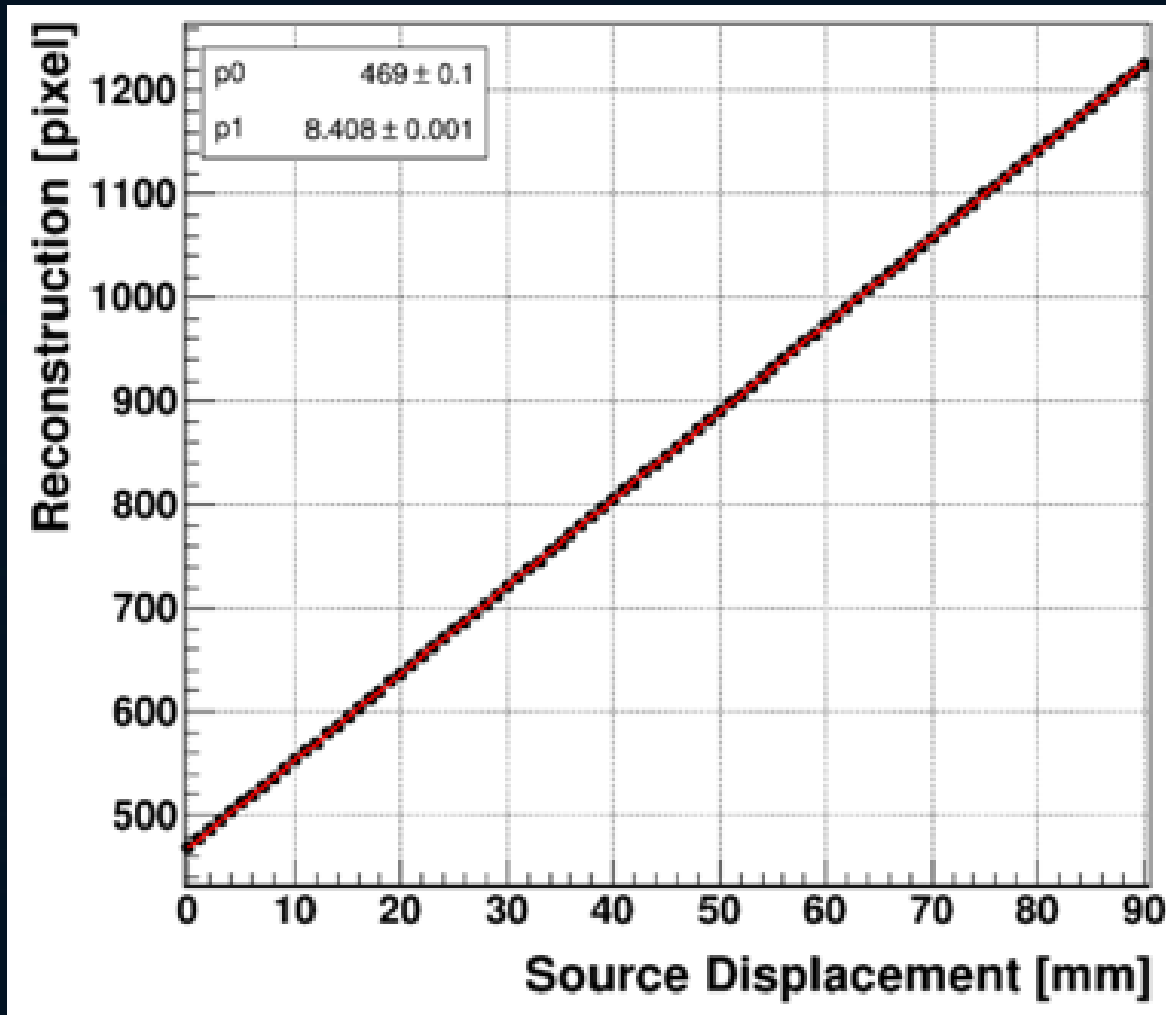

(Left) reconstructed beam centroids in pixel units plotted against precise location of a **3 mm beta source** translated along the X coordinate of the FBSM. (Right) The residual distribution of the reconstructed positions yields spatial resolution of **37 μm** (RMS of fit residuals using Camera-E at **200 fps**).



FBSM Spatial Resolution at 20,000 fps

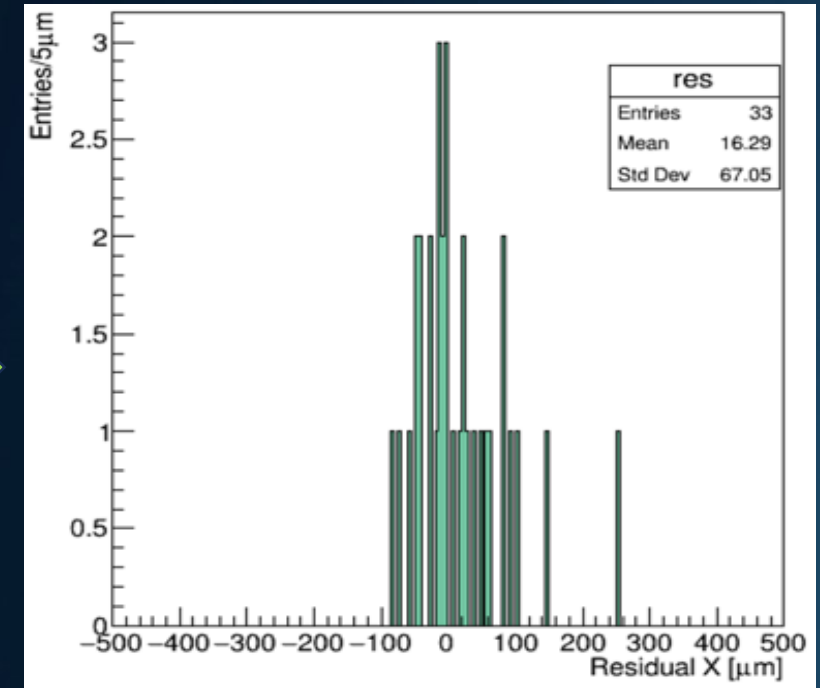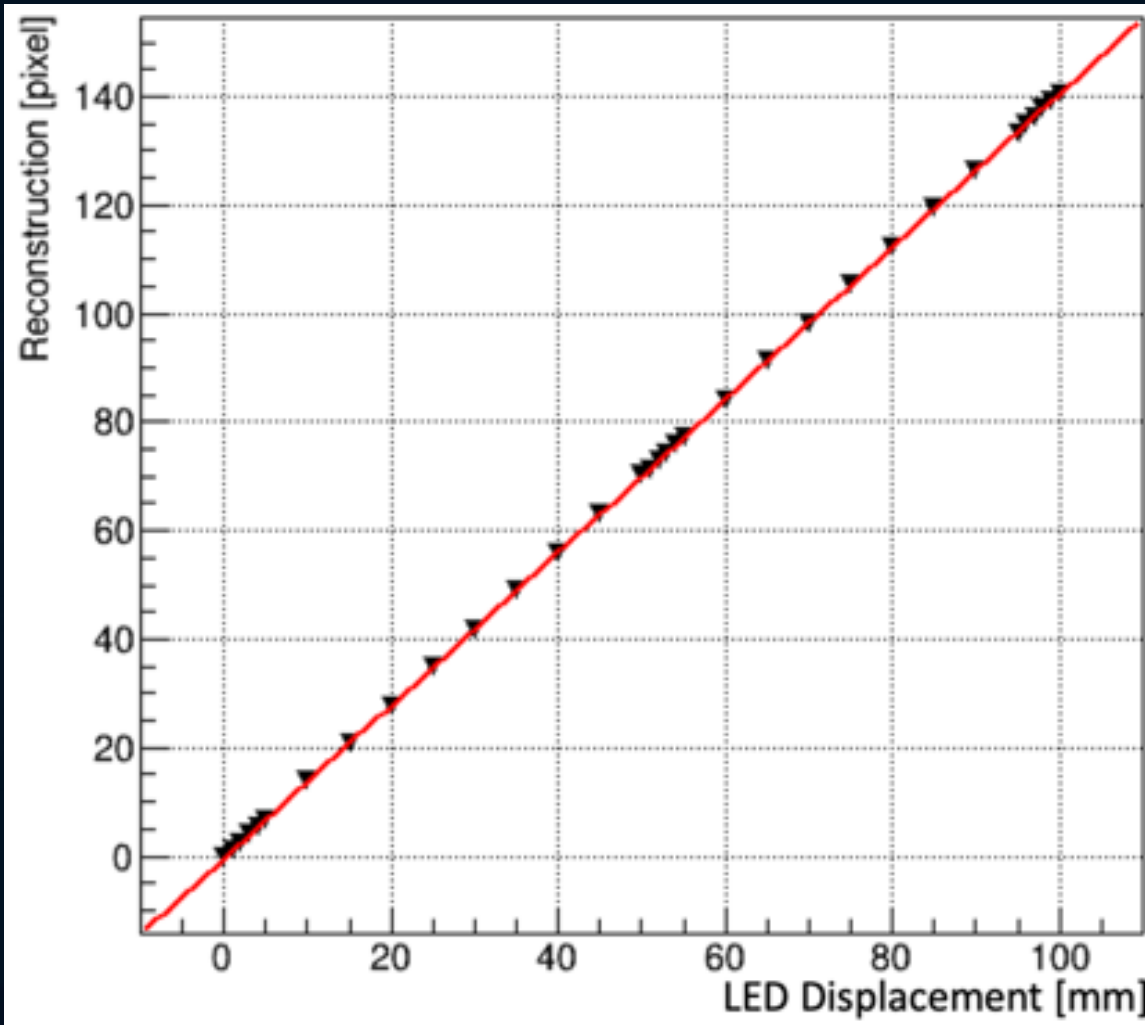

(Left) reconstructed beam centroids in pixel units plotted against precise location of a **10 mm LED source** translated along the X coordinate of the FBSM. (Right) The residual distribution of the reconstructed positions yields spatial resolution of **67 μm** (RMS of fit residuals using Camera-P at **20,000 fps**).



Validation & Collaborations

Radiotherapy (NIH-NCI) and **Nuclear Physics** (DOE-NP)

- Leading Academic & Government Institutions

- University of Michigan
- Loma Linda University
- Stanford Cancer Institute
- University of Texas / MD Anderson
- Texas A&M
- Notre Dame University
- Florida State University
- DOE Argonne National Laboratory
- DOE Facility for Rare Isotope Beam





Technical Summary

✓ = *achieved*

We have **demonstrated** prototype monitors for FLASH-RT beams ✓

- **2D Imaging with large area** 15 cm x 15 cm ✓ 30 x 30 cm in development
- **High sensitivity & dynamic range**: single-particles to FLASH-RT dose rates ✓
- **Linear response**: up to highest FLASH dose rates ✓
- **Spatial resolution** ~ 50 μm , comparable with Gafchromic film ✓
- **Excellent radiation hardness** ✓
 - PM scintillator radiation damage: none observed to 9 kGy ✓
 - HM scintillator radiation damage: overall -0.02 %/kGy, tested to 216 kGy ✓
- **Real-time FLASH data processing** ✓
 - 20 kHz for protons with < 1 μs required for data analysis ✓
 - 1 kHz electrons (in progress)